


Outside Dimensions (V1...V4 and B1...B3, Wall Mounted Units)

Vertical E-Clipse Bypass, **UL type 1**, V1...V4

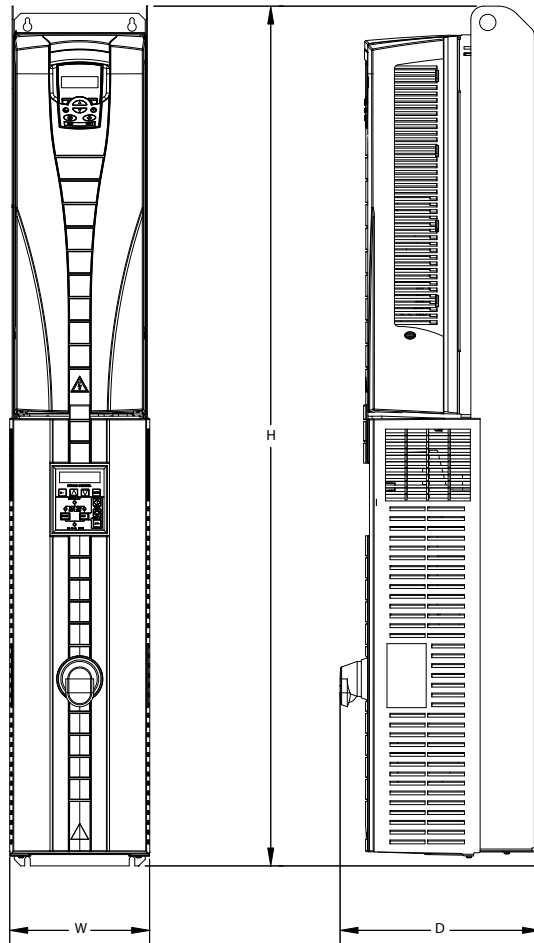

BP0064-2

VERTICAL ENCLOSURE

(230/3 V) (480/3 V)
V1: 1-5 HP; 1-7.5 HP
V2: 7.5,10 HP; 10,15 HP
V3: 15,20 HP; 20 - 30 HP
V4: 25 HP; 40 - 60 HP

Vertical E-Clipse Bypass, UL type 1								
Dimensions Ref.	V1		V2		V3		V4	
	mm	in.	mm	in.	mm	in.	mm	in.
W	136	5.4	136	5.4	214	8.5	215	8.5
H	1020	40.2	1120	44.1	1211	47.7	1316	51.8
D	220	8.7	231	9.1	241.6	9.5	271	10.7